

BL822M1IR

2 MP IP bullet camera / Caméra balle IP 2 MP

Quick Start Guide / Guide Rapide



Find additional manuals, the datasheet, the EU Declaration of Conformity and the latest firmware for this product at:

<http://www.tkhsecurity.com/support-files>

Plus d'information sur le site ci-dessus.




SECURITY SOLUTIONS


Unpack / Déballer



Connect / Connecter

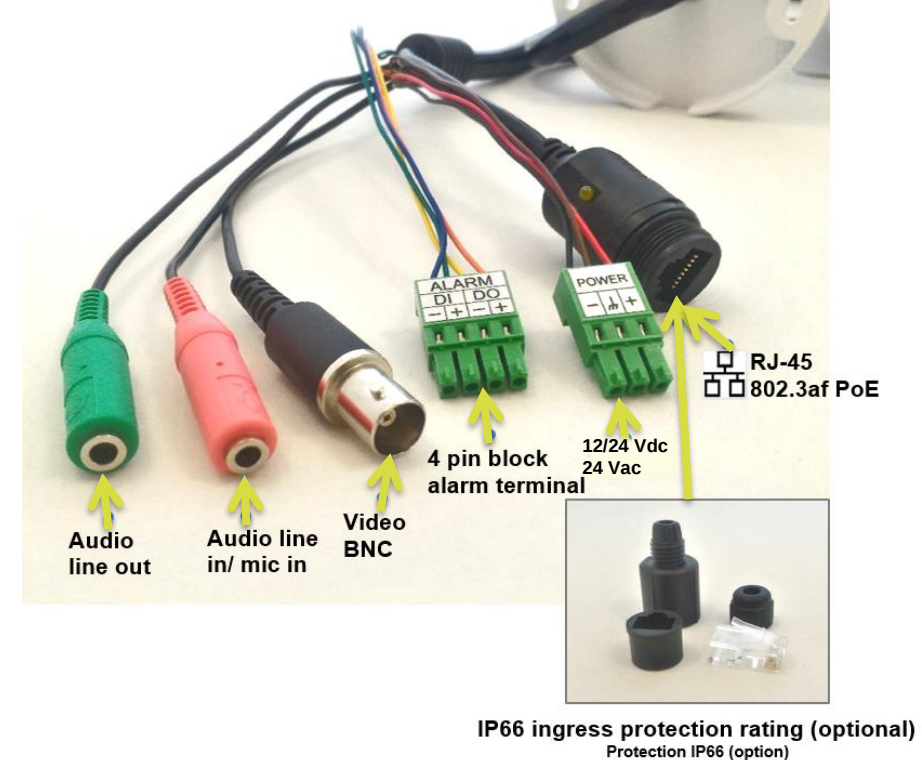


Point camera / Pointer la caméra

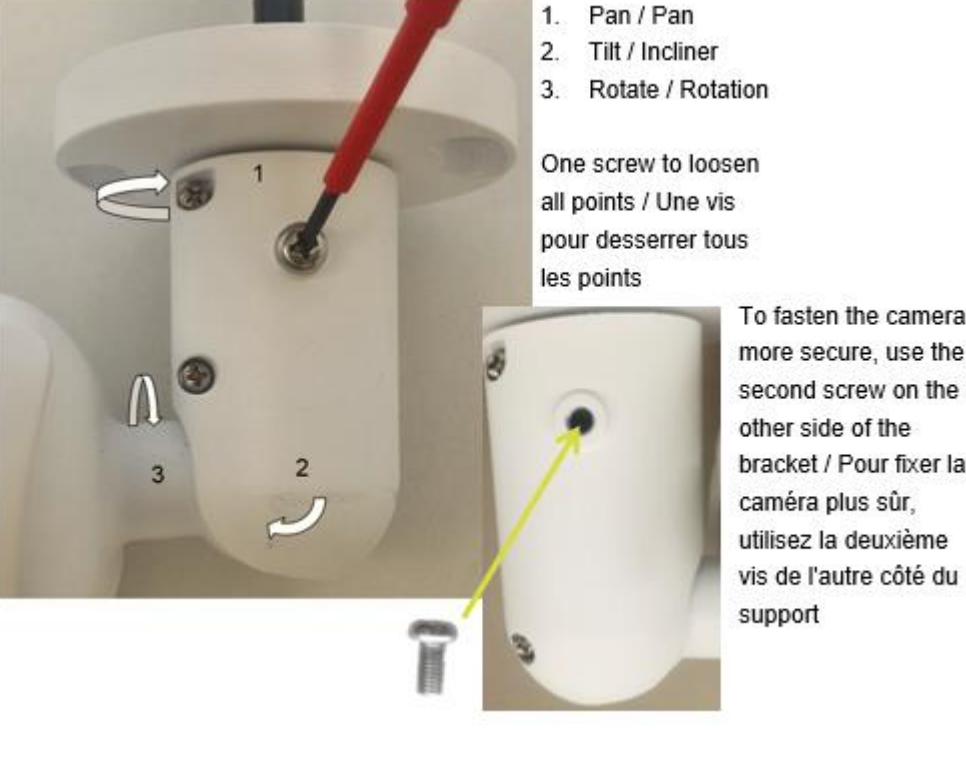

Reset button & microSD / Bouton reset & microSD

1. Remove sunshield / Démontez le pare-soleil.
2. Unscrew the front cover / Dévissez le capot avant.

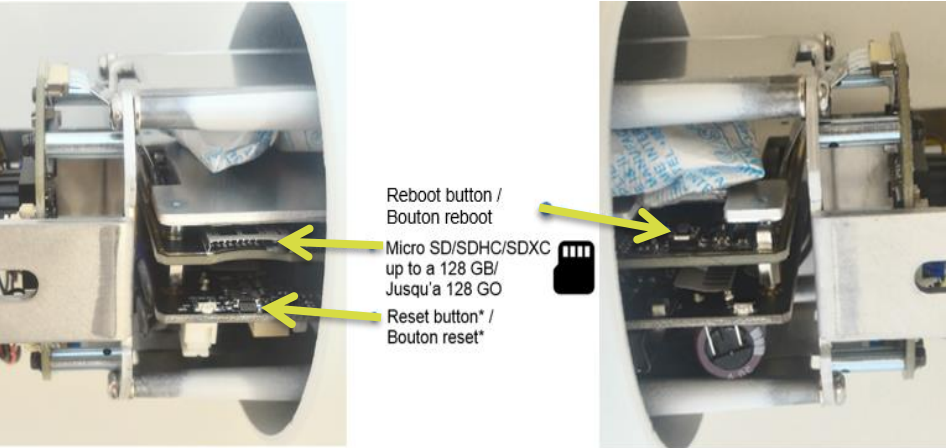

***Reset button:** Press and hold for 10 sec. when powering on or rebooting.
Warning: Restores factory default settings, including IP address, user name and password!
***Bouton reset:** Appuyer et maintenir 10 sec lors de l'allumage ou du reboot.
Attention: La remise a zéro usine supprime l'adresse IP et les mots de passe!

Use fixed IP address / Utiliser une adresse fixe



Use Device Manager (see next) to discover the camera on the network.
Utiliser le "Device Manager (voir ci-après), pour retrouver la caméra sur le réseau.

Install Device Manager / Installer Device Manager

1

2

3

support-files > Software > Siqura Device Manager

Change IP address / Changer l'adresse IP

1

2

3

Open web interface / Ouvrir l'interface web

1

2

Log in / Se connecter

Windows Security

iexplore.exe

The server 172.19.99.31 is asking for your user name and password. The server reports that it is from MegapixelIPCamera.

Warning: Your user name and password will be sent using basic authentication on a connection that isn't secure.

Admin

Password

Remember my credentials

OK Cancel

The default user name and password are:
Admin
1234

For more information about user accounts and passwords, see User Manual.
Pour plus d'informations sur les comptes et mots de passe, voir le manuel d'utilisation.

Set a strong password now!
Créer un mot de passe fort maintenant!

qwerty1234

x6W@oM0a!9#F

View live video / Voir la vidéo en direct

Zoom trigger AF

28/12/2010 05:28

Video Format: only H.264

Zoom: x1 x1/2

Focus: Wide Tele

AF Mode: Manual Zoom AF

MPEG bitrate: middle compression, middle quality

H.264-1 bitrate: 4096 kbps, middle compression, middle quality

H.264-2 bitrate: 1024 kbps, high compression, low quality

H.264-3 bitrate: 1024 kbps, high compression, low quality

H.264-4 bitrate: 1024 kbps, high compression, low quality

Adjust video / Régler les paramètres vidéo

Streaming

Video Format

Video Resolution: H.264 Only

Video Compression: H.264 format: 1920 x 1080 (60 fps)

Video ROI: Portrait support: N/A

Video OCV Protocol: Save

Video Frame Rate: Save

Video Mask: No

Audio: No

Text Overlay Settings:

Include date: ☐ Include time: ☐

Include text string:

Text color: black Text background color: transparent

Video Portrait Allow: No

Video Rotate Type: 180 degree rotate

GOV Settings:

H.264-1 GOV Length: 60 H.264-2 GOV Length: 30

H.264-3 GOV Length: 30 H.264-4 GOV Length: 30

H.264 Profile: Save