

FD880M1IR
8 MP IP dome camera / Caméra dôme IP 8 MP
Quick Start Guide / Guide Rapide



Find additional manuals, the datasheet, the EU Declaration of Conformity and the latest firmware for this product at:



<http://www.tkhsecurity.com/support-files>

Plus d'information sur le site ci-dessus.




**SECURITY
SOLUTIONS**


Unpack / Déballer




Point camera / Pointer la caméra

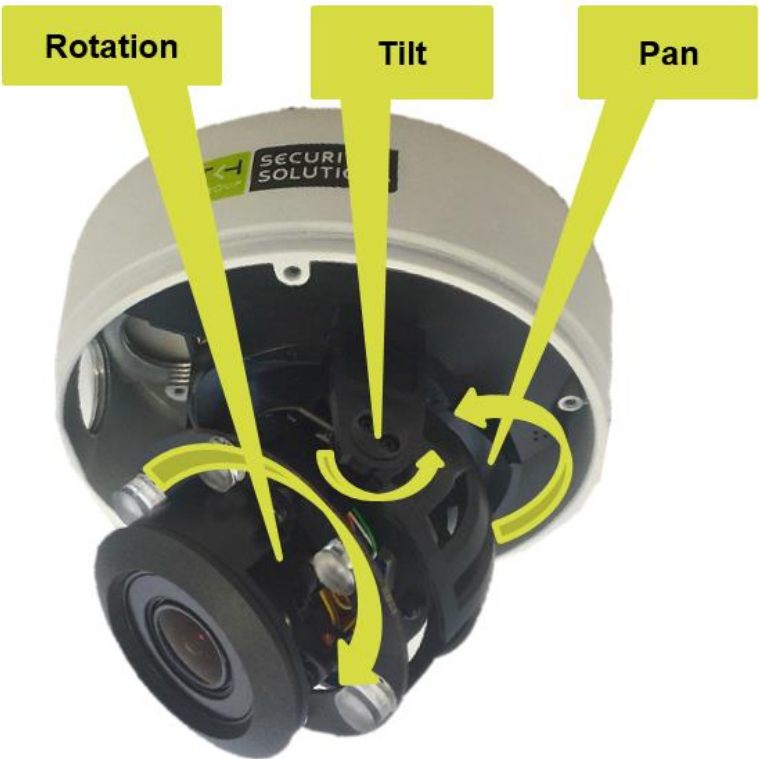

Reset button & SD / Bouton reset & SD

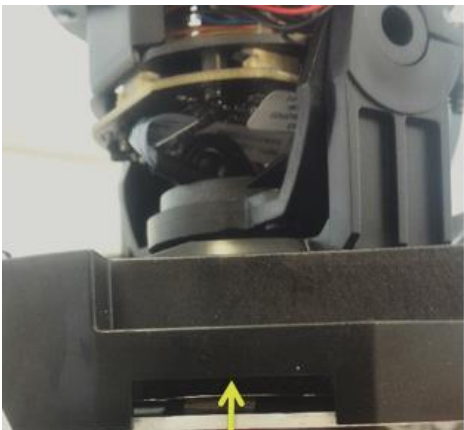

SD/SDXC up to 128 GB / Jusqu'à 128 GO

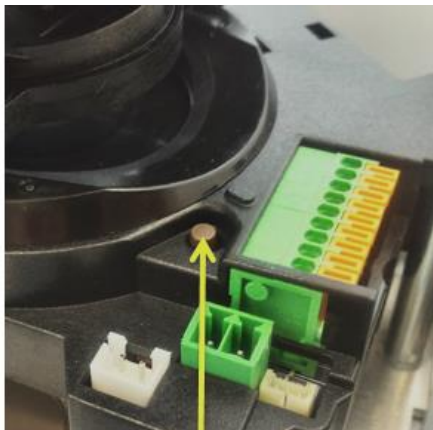

Reset button* / Bouton reset*



***Reset button:** Press and hold for 10 sec. when powering on or rebooting.
Warning: Restores factory default settings, including IP address, user name and password!
***Bouton reset:** Appuyer et maintenir 10 sec lors de l'allumage ou du reboot.
Attention: La remise a zéro usine supprime l'adresse IP et les mots de passe!

IP66 installation instruction / Instructions d'installation IP66



Don't forget the white rubber ring
N'oubliez pas l'anneau en caoutchouc blanc

Fixed IP address / Une adresse fixe



Use Device Manager (see next) to discover the camera on the network.
Utiliser le "Device Manager (voir ci-après), pour retrouver la caméra sur le réseau.

Install Device Manager / Installer Device Manager


1



2



3

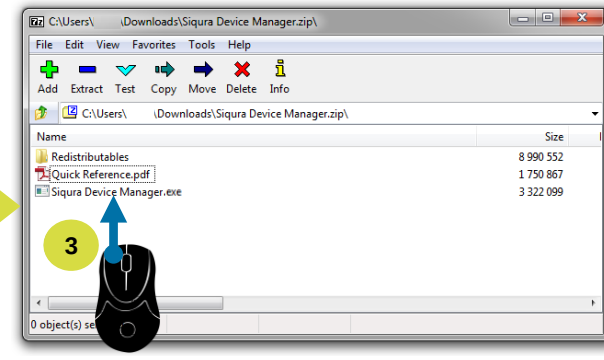

support-files > Software > Siquira Device Manager

Change IP address / Changer l'adresse IP

Siquira Device Manager

Network Interface: VideoLAN: 192.168.1.5

1

2

3

Change Network Settings...

Current IP address: 192.168.1.64

New IP address: 172.22.250.137

New Netmask: 255.255.0.0

New Gateway: 0.0.0.0

Open web interface / Ouvrir l'interface web

Siquira Device Manager

Network Interface: VideoLAN: 172.22.250.21

1

2

Open Web Page

Ctrl+W

Change Credentials in Device... Ctrl+C

Credentials used for Device... Ctrl+U

Change Name... Ctrl+N

Change Network Settings... Ctrl+H

Change Time Settings... Ctrl+T

Identify... Ctrl+I

Backup Settings... Ctrl+B

Restore Settings... Ctrl+R

Upgrade Firmware... Ctrl+F

Capabilities...

Remove device from list Del

Log in / Se connecter

Windows Security

ieexplore.exe

The server 172.19.99.31 is asking for your user name and password. The server reports that it is from MegapixelIPCamera.

Warning: Your user name and password will be sent using basic authentication on a connection that isn't secure.

Admin

Password

Remember my credentials

OK

Cancel

The default user name and password are:
Admin
1234

For more information about user accounts and passwords, see User Manual.
Pour plus d'informations sur les comptes et mots de passe, voir le manuel d'utilisation.

Set a strong password now!
Cr  er un mot de passe fort maintenant!

qwerty1234

x6W@oM0a!9#F

View live video / Voir la vid  o en direct

http://172.19.99.31/

network HD Camera

Home System Streaming Camera Pan Tilt Logout

Continuous AF

2010/04/01 04:06

Video format: H.264-1 H.264-2

Zoom: Wide Tele

Focus: Near Far Push AF

AF Mode: Manual Cont. Zm Trig

MPEG bitrate: middle compression, middle quality

H.264-1 bitrate: 4096 kbps, middle compression

H.264-2 bitrate: 2048 kbps

H.264-3 bitrate: 2048 kbps

H.264-4 bitrate: 1024 kbps, high compression, low quality

Internet Explorer

Adjust video / R  gler les param  tres vid  o

http://172.19.99.31/

network HD Camera

Home System Streaming Camera Pan Tilt Logout

Video Format

Video Compression

Video ROI

Video text overlay

Video OCV Protocol

Video Frame Rate

Privacy Mask

Audio

Video Resolution:

Format 1: 2048 x 1536 (30 fps) H-264-1

Format 2: 1280 x 1024 (30 fps) H-264-2

BNC support: N/A

Note: Image attachment by FTP or E-mail will be available only while MJPEG streaming is selected.

Video Rotate Type: Normal video

GOV Settings:

H.264-1 GOV Length: 30 H.264-2 GOV Length: 30

H.264-3 GOV Length: 30 H.264-4 GOV Length: 30

H.264 Profile:

H.264-1: Main profile H.264-2: Main profile

H.264-3: Main profile H.264-4: Main profile