

VBS 2050 TX-3

Triple optical video transmitter

USER MANUAL

1. General description

The VBS 2050 TX-3 plug-in module contains three identical optical video baseband transmitters. Video input to each of these separate analogue transmitters is converted into intensity modulated optical equivalents. Signal integrity is preserved with the aid of video clamping, making installation and operation adjustment-free. The units transmit at an optical wavelength of 1300 nm and can be connected to single-mode optical fiber.

The 7TE modules will slot into the backplanes of TKH Security's MC 10 or MC 11 power supply cabinets; the EB versions of these allow module status readout from a network.

Details specific to the stand-alone version (/SA option) are described in a supplementary, separate document.

VBS 2050 TX-3 transmitters are suitable for use in combination with ADV systems, allowing incorporation of two independent streams of digital data into a video signal.

2. Indicators and connectors

Figure 1 shows the signal connection facilities and indicators on the front panel of a VBS 2050 TX-3 transmitter module (see also table 1).



	, ST connectors (3x)	Optical output
	, 75 Ω BNC connectors (3x)	Video input
Status indicator LEDs		
	* DC	DC power supply
	* NV, 3x	No video at input

Table 1. Indications and connectors on the front panel of the VBS 2050 TX-3

3. Installation instructions

- VBS 2050 TX-3 units should always be used in combination with TKH Security power supply cabinets or in TKH Security stand-alone housings.
- Plug the module into the power cabinet (or connect the power supply of the /SA housing) and connect suitable video and optical fiber equipment to the module.
- After powering on, at least the green DC LED should glow.
- Upon feeding a TX-3 input with a proper video signal, the corresponding NV LED (red) should go out.

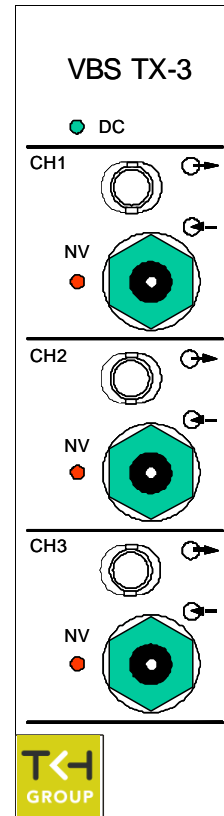


Figure 1.
VBS 2050 TX-3
front panel layout

4. Care and maintenance

To maintain reliable operation of the module, observe the following:

- Prevent dust from collecting on the equipment
- Protect the equipment against moisture
- Maintain sufficient free space around the equipment for cooling.

General safety and EMC information is found in the final section of this document.

5. Technical specifications

The technical specifications of the VBS 2050 TX-3 are given in table 2 below.

Optical		
Wavelength	1300	nm
Source	LED	
Fiber type	9	µm
Output level	> -28	dBm
System link budget	12 ⁽¹⁾	dB
Video		
Video system	PAL/SECAM/NTSC	
Input impedance	75	Ω
Return loss	30	dB
Input level	1	V _{PP}
Network management variables		
Voltages		
Module temperature		
Alarms		
Environmental		
Ambient temperature		
full performance	+5 to +45	°C
operating	-40 to +74	°C
Relative humidity	<95 (no condensation)	%
Electrical safety	AL / IEC / EN 60950-1	
UL recognition file	E242498	
Laser safety	IEC 60825-1, IEC 60825-2	
EMC immunity	EN 55024, EN 50130-4, EN 61000-6-2	
EMC emission	EN 55022 (Class B) FCC 47 CFR 15 (Class B)	
Electrical		
Power supply voltage	12 (/SA)	V _{dc}
Power consumption	1.7	W
Mechanical		
Optical connectors	ST (3x)	
Video connectors	BNC (3x)	
Outer dims. (h x wx d)	128 x 35 x 190	mm
Weight (approx.)	0.450	kg

¹⁾ With receivers VBS 2040 RX/VBS 2050 RX-3.

Table 2. Technical specifications of the VBS 2050 TX-3

6. Safety, EMC, ESD

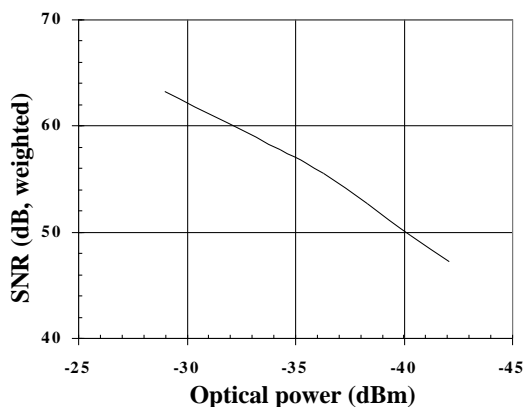


Figure 2.

VBS 2040/2050 systems signal-to-noise ratio as a function of optical level (typical; 1300 nm, measured with 9 µm fibre)

General

The safety information contained in this section, and on other pages of this manual, must be observed whenever this unit is operated, serviced, or repaired. Failure to comply with any precaution, warning, or instruction noted in the manual is in violation of the standards of design, manufacture, and intended use of the unit.

Installation, adjustment, maintenance and repair of this equipment are to be performed by trained personnel aware of the hazards involved. For correct and safe use of the equipment and in order to keep the equipment in a safe condition, it is essential that both operating and servicing personnel follow standard safety procedures in addition to the safety precautions and warnings specified in this manual, and that this unit be installed in locations accessible to trained service personnel only.

Siquira assumes no liability for the customer's failure to comply with any of these safety requirements.

UL/IEC/EN 60950-1: General safety requirements

The equipment described in this manual has been designed and tested according to the UL/IEC/EN 60950-1 safety requirements.

If there is any doubt regarding the safety of the equipment, do not put it into operation. This might be the case when the equipment shows physical damage or is stressed beyond tolerable limits (e.g. during storage and transportation).

Before opening the equipment, disconnect it from all power sources. The equipment must be powered by a SELV[®] power supply.

When this unit is operated in extremely elevated temperature conditions, it is possible for internal and external metal surfaces to become extremely hot.

Optical safety

This optical equipment contains Class 1M lasers or LEDs and has been designed and tested to meet IEC 60825-1:1993+A1+A2 and IEC 60825-2:2004 safety class 1M requirements.

Optical equipment presents potential hazards to testing and servicing personnel owing to high levels of optical radiation.

When using magnifying optical instruments, avoid looking directly into the output of an operating transmitter or into the end of a fiber connected to an operating transmitter, or there will be a risk of permanent eye damage. Precautions should be taken to prevent exposure to optical radiation when the unit is removed from its enclosure or when the fiber is disconnected from the unit. The optical radiation is invisible to the eye.

Use of controls or adjustments or procedures other than those specified herein may result in hazardous radiation exposure.

The installer is responsible for ensuring that the label depicted below (background: yellow; border and text: black) is present in the restricted locations where this equipment is installed.



The locations of all optical connections are listed in the Indications and Connectors section of this manual. Optical outputs and wavelengths are listed in the Technical Specifications section of this manual.

EMC

Warning: Operation of this equipment in a residential environment could cause radio interference.

This device has been tested and found to meet the CE regulations relating to EMC and complies with the limits for a Class A device, pursuant to Part 15 of the FCC rules.

Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation. These limits are designed to provide reasonable protection against interference to radio communications in any installation. The equipment generates, uses, and can radiate radio frequency energy; improper use or special circumstances may cause interference to other equipment or a performance decrease due to interference radiated by other equipment. In such cases, the user will have to take appropriate measures to reduce such interactions between this and other equipment.

Note that the warning above does not apply to TKH Security products which comply with the limits for a Class B device. For product-specific details, refer to the EU Declaration of Conformity.

Any interruption of the shielding inside or outside the equipment could make the equipment more prone to fail EMC requirements.

To ensure EMC compliance of the equipment, use shielded cables for all signal cables including Ethernet, such as CAT5E SF/UTP or better, as defined in ISO IEC 11801. For power cables, unshielded three wire cable (2p + PE) is acceptable. Ensure that *all* electrically connected components are carefully earthed and protected against surges (high voltage transients caused by switching or lightning).

ESD

Electrostatic discharge (ESD) can damage or destroy electronic components. Proper precautions should be taken against ESD when opening the equipment.

^{*)} SELV: conforming to IEC 60950-1, <60 Vdc output, output voltage galvanically isolated from mains. All power supplies or power supply cabinets available from Siqura comply with these SELV requirements.

7. Product disposal

Recycling



The unit contains valuable materials which qualify for recycling. In the interest of protecting the natural environment, properly recycling the unit at the end of its service life is imperative.

8. EU Declaration of Conformity

The EU Declaration of Conformity for this product is available at <http://www.tkhsecurity.com/support-files>